


지시의 용접처수 a=0	지시의 모서리부분 지시의 일반 모서리재거 C = 0.1 R = 0.1	지 시 의 일반치수 허용치 ( JIS B 0405 )	표 준 치 수	0.5	3	6	30	120	1000	표 면 거 칠 기								NO.	DATE	REVISION & DESCRIPTION		SIGNATURE		
				~ 3	~ 6	~ 30	~ 120	~ 1000	~ 2000	Ra	✓	25/	12.5/	6.3/	3.2/	1.6/	0.8/					0.2/	0.1/	REVIEWED
				Rmax		100S	50S	25S	12.5S	6.3S	3.2S	0.8S	0.4S											
				다듬질	~	▽	▽▽	▽▽▽	▽▽▽▽															

SJ-HD-40A-1590L-18-6050-304STS(MODEL NUMBER-상SJ-007)

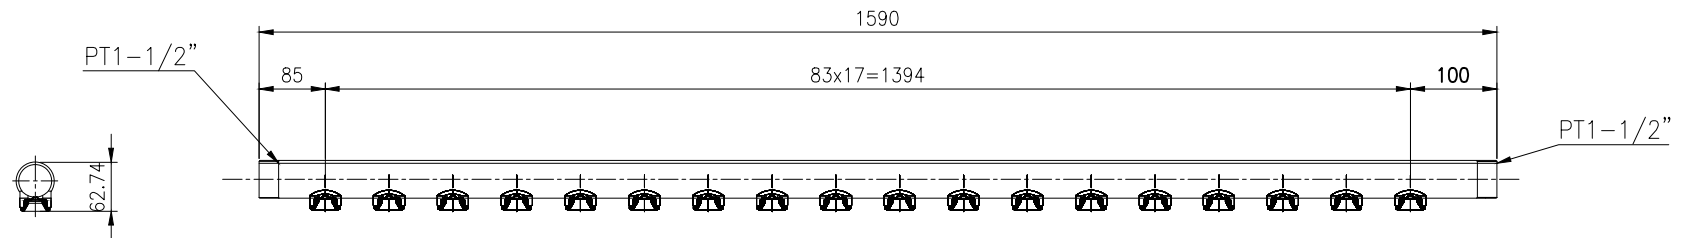

					SPECIFICATION		CUSTOMER		 (주) 세진노즐 SEJIN NOZZLE CO., LTD SPRAY NOZZLE & ENGINEERING TEL:02-895-0160			
					PRESSURE ( ) ( Kg/Cm <sup>2</sup> )	SPRAY ANGLE ( ° ) ( ) - ( ) - ( )  CAPACITY ( L/Min. ) ( ) - ( ) - ( )		PROJECT NAME				
1	BODY	MC					PART NAME		For : SHOWER HEADER			
NO.	DESCRIPTION	MATREIAL	QUANTITY	REMARK'S					APPROVED	CHECKED	DESIGNED	DRAWN
									SCALE	DWG No.		
									DATE			