


지시의 용접처수 a=0	지시의 모서리부분 지시의 일반 모서리재거 C = 0.1 R = 0.1	지 시 외 일반치수 허용치 ( JIS B 0405 )	표 면 거 질	0.5 ~ 3	3 ~ 6	6 ~ 30	30 ~ 120	120 ~ 1000	1000 ~ 2000	표 면 거 질 기								NO.	DATE	REVISION & DESCRIPTION	SIGNATURE			
										Ra	✓	25	12.5	6.3	3.2	1.6	0.8				0.2	0.1	REVIEWED	CHECKED
										Rmax		100S	50S	25S	12.5S	6.3S	3.2S				0.8S	0.4S		
										다듬질	~	▽	▽▽	▽▽▽	▽▽▽▽									

SJ-HD-40A-1875L-28-6012-304STS(MODEL NUMBER-하SJ-005)

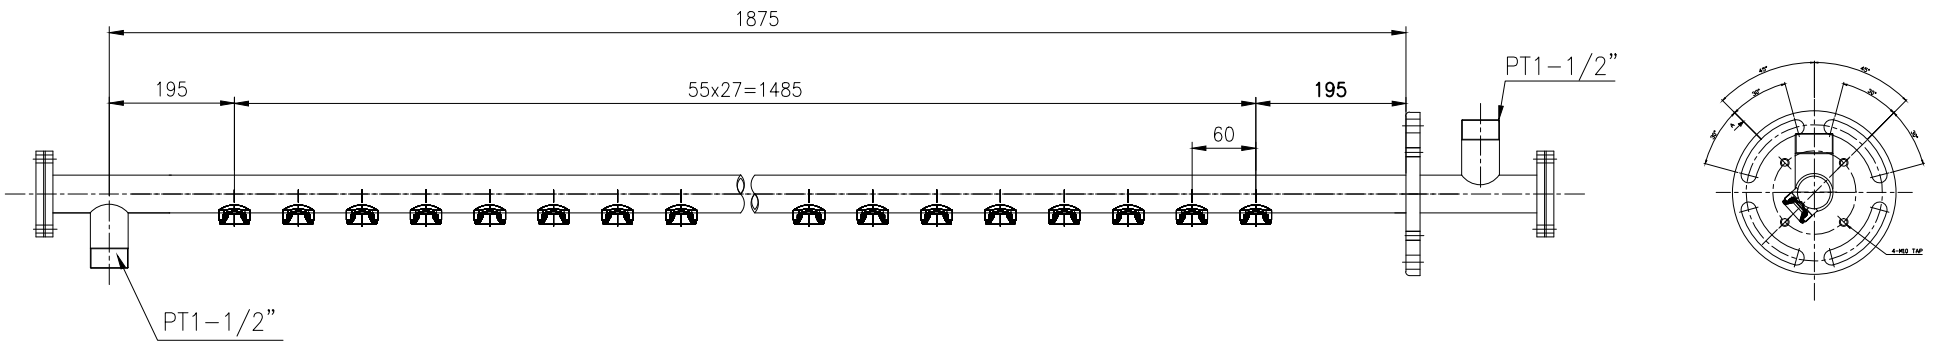

					SPECIFICATION		CUSTOMER		(주) 세진노즐 SEJIN NOZZLE CO., LTD. SPRAY NOZZLE & ENGINEERING TEL:02-895-0160	
					PRESSURE ( ) ( Kg/Cm <sup>2</sup> )	SPRAY ANGLE ( ° ) ( ) - ( ) - ( )  CAPACITY ( L/Min. ) ( ) - ( ) - ( )		PROJECT NAME		
1	BODY	MC					PART NAME		APPROVED _____ CHECKED _____ DESIGNED _____ DRAWN _____	
NO.	DESCRIPTION	MATREIAL	QUANTITY	REMARK'S			For : SHOWER HEADER		SCALE _____ DATE _____ DWG No. _____	