


지시의 용접처수 a=0	지시의 모서리부분 지시의 일반 모서리재거 C = 0.1 R = 0.1	지 시 의 일반치수 허용치 (JIS B 0405)	표 면 거 질	구 경	0.5 ~ 3	3 ~ 6	6 ~ 30	30 ~ 120	120 ~ 1000	1000 ~ 2000	표 면 거 질 기								NO.	DATE	REVISION & DESCRIPTION		SIGNATURE	
					Ra	✓	25/	12.5/	6.3/	3.2/	1.6/	0.8/	0.2/	0.1/	REVIEWED	CHECKED								
					Rmax		100S	50S	25S	12.5S	6.3S	3.2S	0.8S	0.4S										
다듬질				~	▽	▽▽	▽▽▽	▽▽▽▽																

SJ-HD-40A-2000L-25-6012-304STS(MODEL NUMBER-상SJ-006)

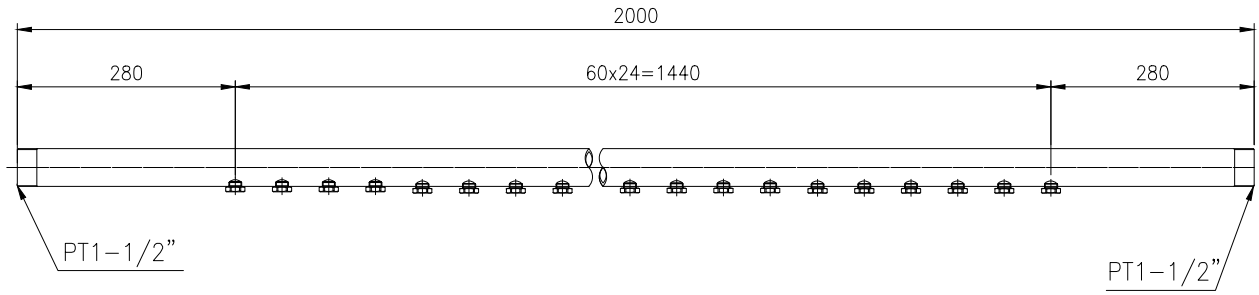

					SPECIFICATION		CUSTOMER		 (주) 세진노즐 SEJIN NOZZLE CO., LTD. SPRAY NOZZLE & ENGINEERING TEL:02-895-0160	
					PRESSURE () (Kg/Cm ²)	SPRAY ANGLE (°) () - () - ()		PROJECT NAME		
							PART NAME		APPROVED	
							For : SHOWER HEADER		CHECKED	
									DESIGNED	
									DRAWN	
									SCALE	
									DWG No.	
									DATE	

1	BODY	MC		
NO.	DESCRIPTION	MATREIAL	QUANTITY	REMARK'S