



집진기 WATER CURTAIN HEADER-SJ-112*20*65-SS304

지시의 용접치수 g=0	지시의 일반모서리계기 C = 0.1 R = 0.1	지시 외 일반치수 허용치 (JIS B 0405)	공차 구분	0.5 ~ 3	3 ~ 6	6 ~ 30	30 ~ 120	120 ~ 1000	1000 ~ 2000	표면 거칠기							
				±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	Ra	25/√	12.5/√	6.3/√	3.2/√	1.6/√	0.8/√	0.2/√
				Rmax	100S	50S	25S	12.5S	6.3S	3.2S	0.8S	0.4S					
				다듬임	~	▽	▽▽	▽▽▽	▽▽▽▽	▽▽▽▽▽							

NO.	DATE	REVISION & DESCRIPTION	SIGNATURE	
			REVIEWED	CHECKED

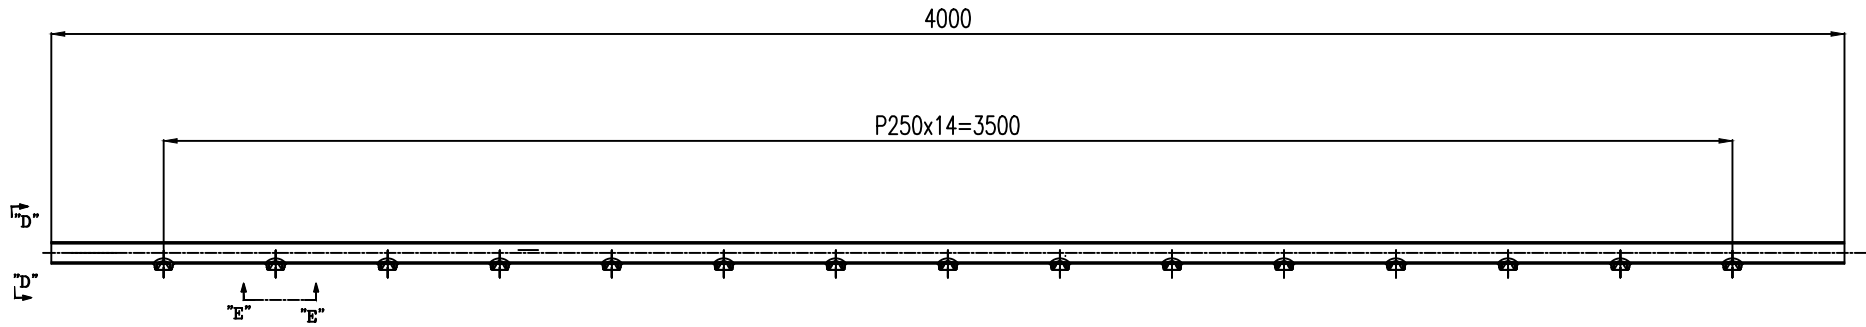

SECTION D-D



SECTION E-E

** NOZZLE PIPE 40xSch20=STS304

** SPRAY NOZZLE
SJ-SF NOZZLE 사용